


# Relay terminal box for 12 circuits manual


## CCII-TBOX

For CCII-LA-S/C

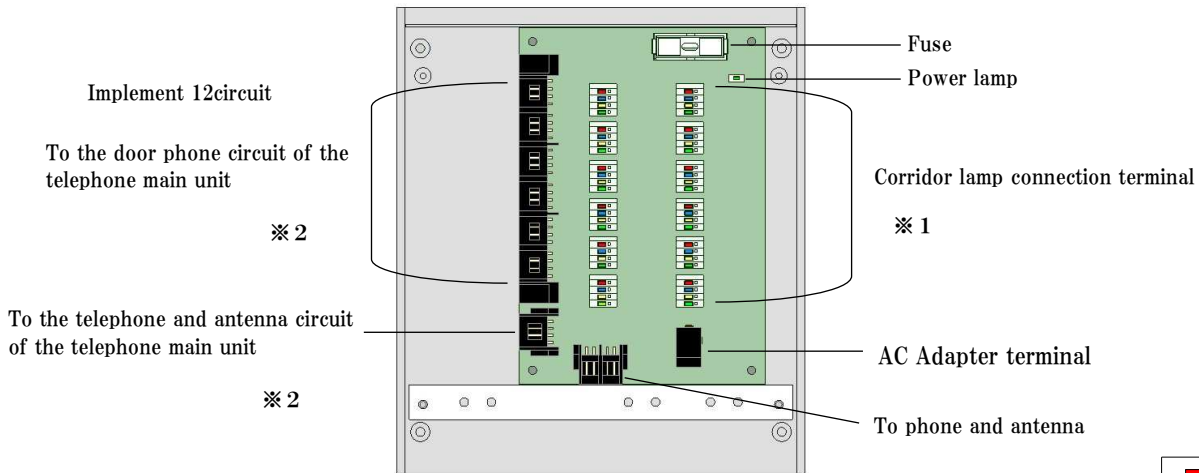

※ 1 The connection terminal is a screw-less terminal Compatible  $\varnothing 0.4\text{mm} \sim \varnothing 0.65\text{mm}$  cable.

※ 2 The connection terminal is a quick terminal Compatible  $\varnothing 0.4\text{mm} \sim \varnothing 0.65\text{mm}$  cable.

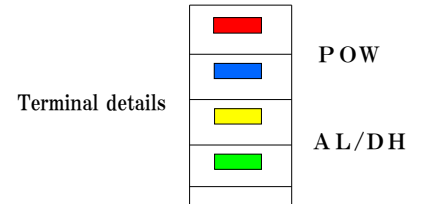

### Installation conditions and conditions of use

Operating ambient temperature	0 ~ 40 °C
Operating ambient humidity	25 % ~ 85 % (With no condensation)
Working voltage	Input voltage AC100 v ~ 240 v    Output voltage DC24 V $\pm$ 10 %
Usable cable	$\varnothing 0.4\text{mm} \sim \varnothing 0.65\text{mm}$

⚠ CAUTION Do not short circuit the power. Can cause fire or malfunction.

⚠ CAUTION Do not connect the power supply wires to terminal other than those specified. Can cause fire or malfunction.

